


215 Grand Street  
Lockport, NY 14095

Phone: 716-434-6524  
Fax: 716-434-9857

- **ACU-RITE Millpwr 3 axes control**
- **3HP Spindle Motor, R8 Spindle Taper**
- **Electronic vari-speed up to 5,000 rpm spindle speed with HI-LO gear**
- Hardened & Ground ways with turcite-B
- Precision ballscrews for high accuracy
- **FC30 Meehanite Casting annealed & stress relieved** for long term reliability
- Chrome quill
- **Box way design** on Y axis provides maximum rigidity & stability
- Standard way covers
- Tool box & Tools
- **Precision APEC class7 spindle bearing** to ensure spindle run out within 0.0002

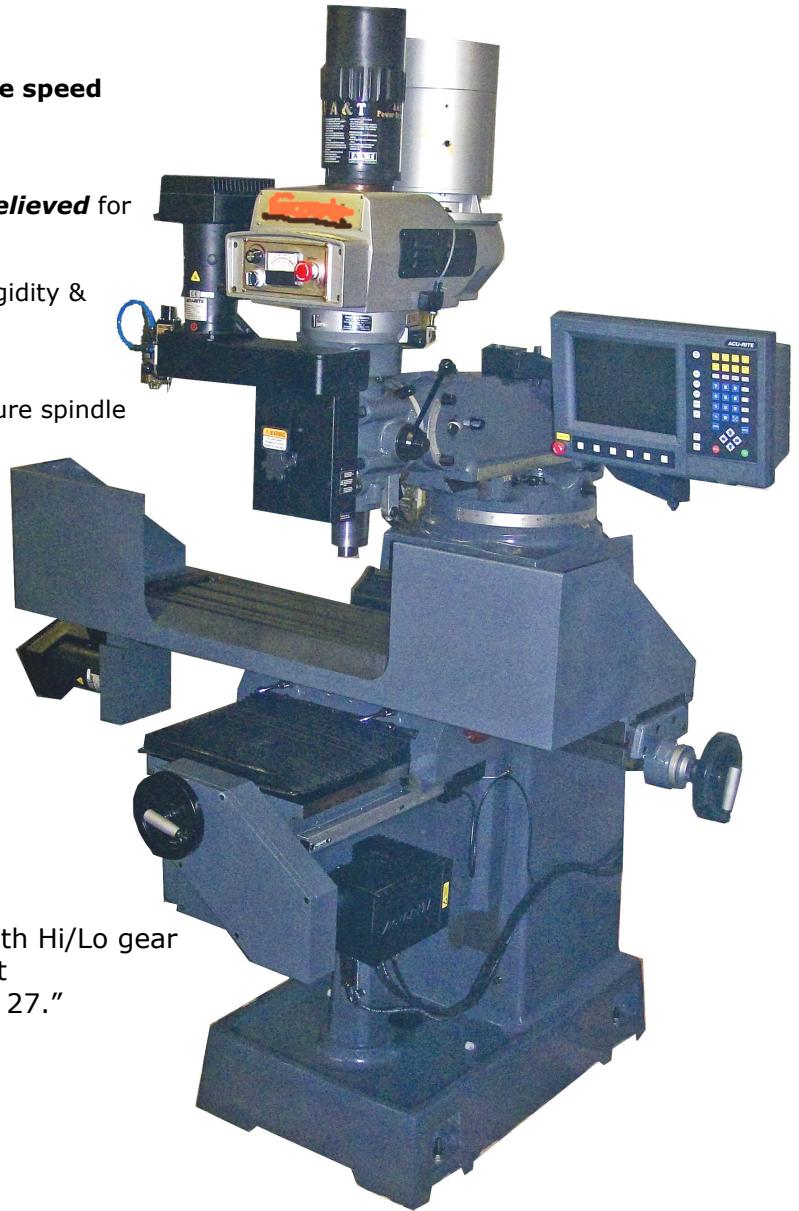

Shown with optional Power draw bar & Table guard

## **Specification:**

Table: 10" x 50"  
Longitudinal travel (X-axis): 30"  
Cross travel (Y axis): 16"  
Z axis travel quill: 4.75"  
Kneetravel (manual): 16"  
Quill diameter: 3.375"  
Spindle nose to table top (D): 0.75"-16.75"  
Load capacity: 600 lb  
Spindle taper: R8  
Spindle Speed (r.p.m.): 70 to 5000 rpm with Hi/Lo gear  
Transmission of spindle & motor: Timing Belt  
Spindle center to column front surface: 6." to 27."

## **Motor:**

Spindle motor/max torque: 3HP  
KVA rating: 4KVA, 15amps  
Coolant pump (optional) 1/8 Hp  
Lubrication pump: Auto Lubrication  
Power requirement: 4 KVA, 3 Phase 208-230 voltage  
Length X Width X Height (LXWXH): 108" x 77" x 92"

Net Weight: 3,100 lbs.

***“World Class Machines Distributed World Wide”***